


WITH BELT DRIVE, REVERSIBLE, COOLING SYSTEM.

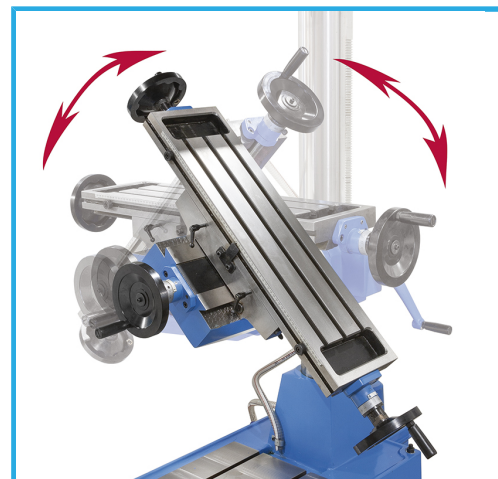

|                                                               |                        |
|---------------------------------------------------------------|------------------------|
| Max drilling capacity on cast iron with pre-drilling hole     | 40 mm                  |
| Max drilling capacity on steel with pre-drilling hole(s235jr) | 32 mm                  |
| Face milling cutter max                                       | 80 mm                  |
| End milling cutter max                                        | 25 mm                  |
| Tapping capacity                                              | 24 mm                  |
| Spindle taper                                                 | CM 4                   |
| Chuck sizes                                                   | 1 - 13 mm B16          |
| Spindle speed                                                 | 100 - 2200 rpm         |
| Spindle travel                                                | 130 mm                 |
| Spindle rotation                                              | Dx - Sx                |
| Quill                                                         | 75 mm                  |
| Column                                                        | 123 mm                 |
| Manual vertical feed division                                 | 0,05 mm                |
| Distance spindle axis - column surface                        | 300 mm                 |
| Distance between spindle nose and table                       | 125 - 525 mm           |
| Table dimensions                                              | 730 x 210 mm           |
| Slot                                                          | 14 mm                  |
| Longitudinal axis                                             | 480 mm                 |
| Cross axis                                                    | 220 mm                 |
| Base dimensions                                               | 470 x 680 mm           |
| Motor                                                         | 400 V 50 Hz 1,1/1,9 kW |
| Cooling pump                                                  | 400 V 50 Hz 75 W       |
| Dimensions                                                    | 850 x 1100 x 1900h mm  |

### Included

Drill chuck with key 1 - 13 mm B16  
Drill chuck shank MT 4 B16  
Spindle taper shank MT 4 Ø 27 mm  
Reduction sleeve MT 4/3  
Reduction sleeve MT 3/2  
Coolant system  
Tie rod M16  
Service keys

|                             |                    |
|-----------------------------|--------------------|
| <b>Net weight</b>           | 410 kg             |
| <b>Packaging dimensions</b> | 1150x620x2020 h mm |
| <b>Gross weight</b>         | 461,00 kg          |
| <b>EAN Code</b>             | 8012667362102      |