


WITH 2 SPEED MOTOR AND 3 AXIS READ OUT, SEMI NORTON GEAR BOX. TURNING BAR WITH ADJUSTABLE CLUTCH.



FERVIplus

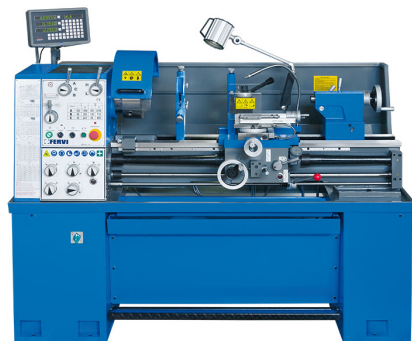

Centers height	200 mm
Max swing over the bed	400 mm
Max swing over the cross slide	258 mm
Max swing over the gap	550 mm
Tool height	20 mm
Distance between centers	1000 mm
Spindle bore	55 mm
Spindle bore	50 mm
Spindle nose Camlock	Camlock D1-5
Spindle bore taper MT	6
Spindle speed	(12) 45 - 2000 rpm
Longitudinal feeds	0,06 - 2,78 mm/rev
Cross feeds	0,01 - 0,72 mm/rev
Metric threads	0,8 - 14 mm
Inch threads	2 - 28 TPI
Tailstock taper MT	4
Motor	400V 50 Hz 1,5 / 2,4 kW
Dimensions	1860 x 800 x 1600 h mm
Net weight	760 kg
Packaging dimensions	1930 x 760 x 1600h mm
Gross weight	815,00 kg
EAN Code	8012667247331

Included

3+3 jaw self centering chuck Ø 200 mm
4 independent jaw chuck Ø 200 mm
Reduction sleeve MT 6/4
Face plate Ø 320 mm
Follow rest
Steady rest
2 x Dead center MT 4
Live center MT 4
Thread dial
Leadscrew hood
Turret guard
Chuck safeguard
Full length splash guard
TOAB quick change tool post
Working lamp
Cooling system
Foot brake
Clutch on turning bar
Quick locking tailstock carriage
Wagon gears in oil bath